



## ATG Electronics® iBright™ LED Linear Fixture USER GUIDE



### NOTE:

Please read the entire manual to fully understand and safely use this product.

The products can be used at the voltage of 100-277V AC, 50/60Hz, suitable for indoor dry environment.

Specifications are subject to change without notice. Please visit [www.atgelectronics.com](http://www.atgelectronics.com) for the most recent user guide versions.

### INCLUDED IN THIS BOX

ATG Electronics® iBright™ LED Linear Fixture, 1 PCS.

User Guide, 1 Set.

### UNPACKING

- 1) Unpack and carefully examine the product.
- 2) Report any damage and save all packing materials if any parts were damaged during shipping.
- 3) Do not attempt to use this apparatus if it is damaged.

### INSTALLATION INSTRUCTIONS

- 1) CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 2) The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
- 3) Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.

### MAINTENANCE

- 1) Prior to cleaning the product, make sure it has been disconnected from the power supply.
- 2) Use a dry or slightly moistened cloth for cleaning.
- 3) Never use any chemicals or abrasive materials for cleaning.

### INSTALLATION STEPS


Turn off the main power before installation.

#### 1. Surface Mount

- 1) Slip the mounting bracket into the groove located on the lamp back and fix it with screws.




- 2) Fix the LED Linear Fixture to the ceiling with screws.
- 3) Connect the Linear fixture's input and ground wires to the main power outlet.

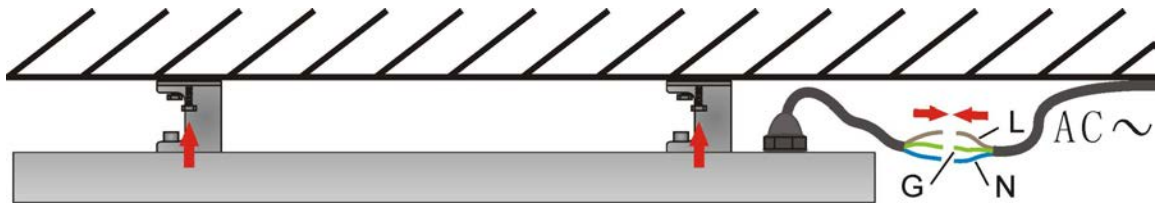


## 2. Suspended


- 1) Fix the rope gripper base to the ceiling with screws.

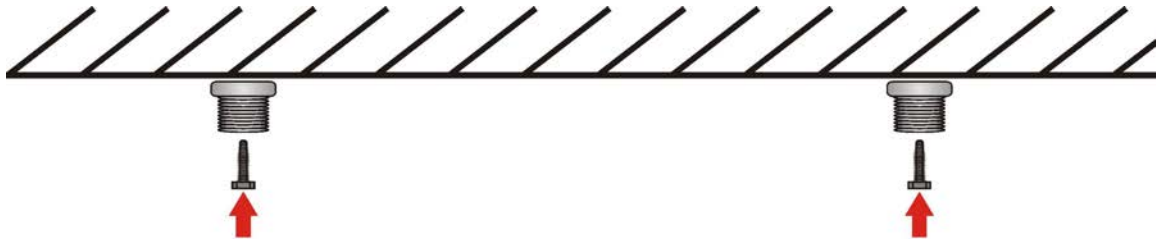


- 2) Screw the rope gripper to the base and adjust the rope length.

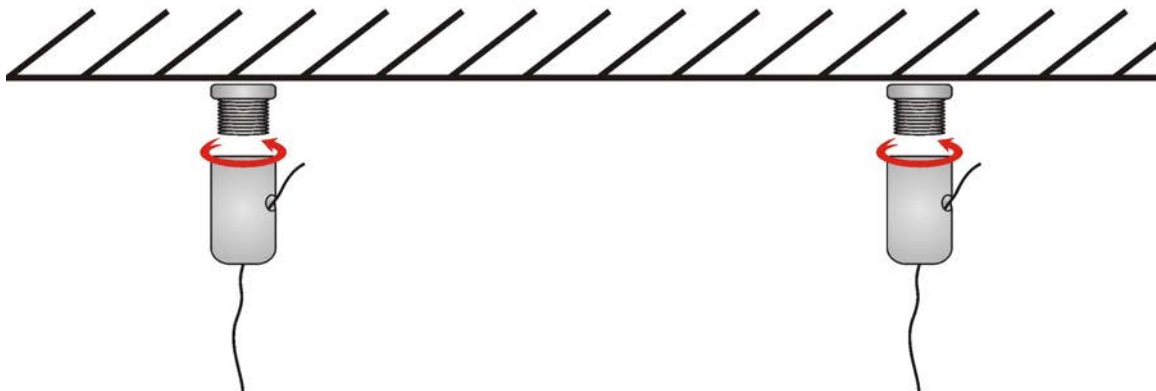


- 3) Connect the Linear fixture's input and ground wires to the main power outlet.

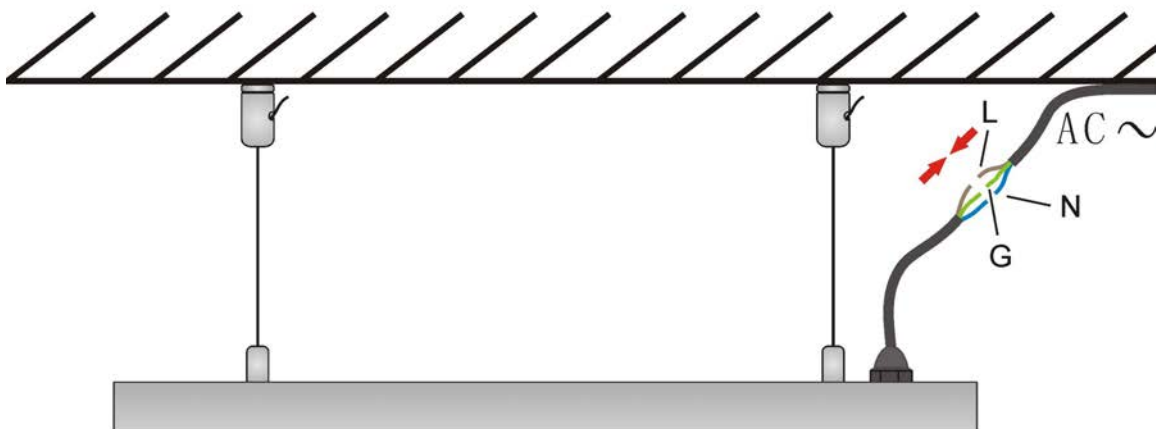



# Connecting Huron Linear Fixtures

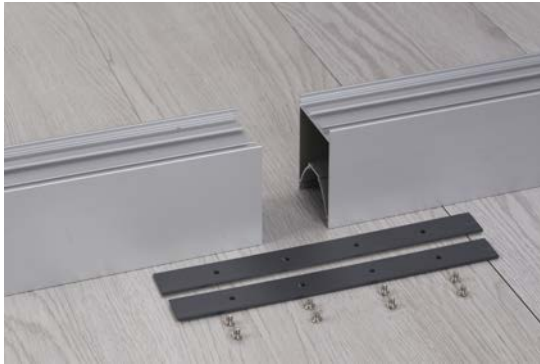


Parts included:  
2 Huron Linear Fixture casings  
2 connecting bars  
8 screws

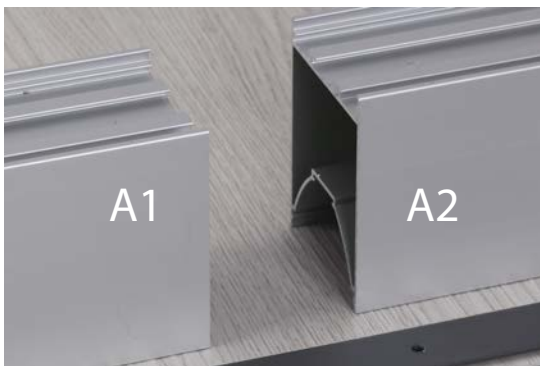

Step 1:  
Remove both caps of  
facing fixtures A1 and A2

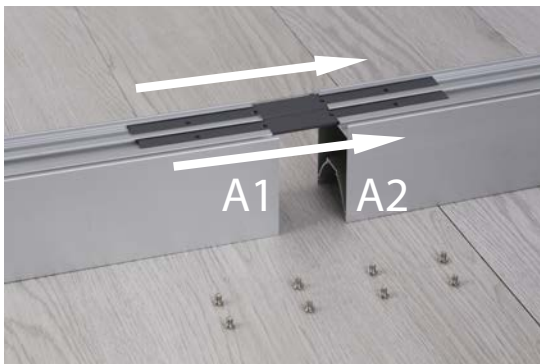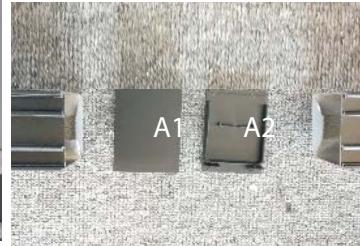

Step 2:  
Slide both connecting bars into  
channels that lay side by side,  
connecting A1 and A2

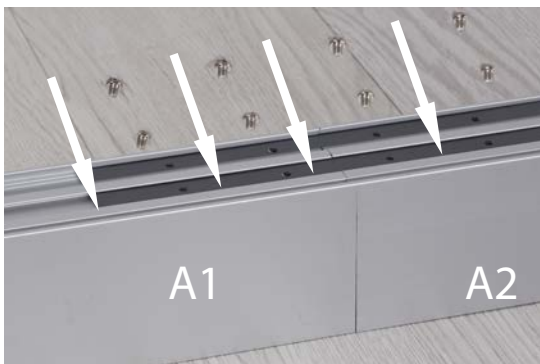

Step 5:  
Use screws (8) to fix in place,  
connectors and casing