



ATG Electronics® iBright™ LED Vapor Proof Fixture

USER GUIDE

NOTE:

Please read the entire manual to fully understand and safely use this product.

The products can be used at the voltage of 100-277V AC, 50/60Hz, suitable for indoor dry environment.

Specifications are subject to change without notice. Please visit www.atgelectronics.com for the most recent user guide versions.

INCLUDED IN THIS BOX

ATG Electronics® iBright™ LED Vapor Proof Fixture, 1 PCS.

Mounting clips, 2 PCS.

User Guide, 1 Set.

UNPACKING

- 1) Unpack and carefully examine the product.
- 2) Report any damage and save all packing materials if any parts were damaged during shipping.
- 3) Do not attempt to use this apparatus if it is damaged.

INSTALLATION INSTRUCTIONS

- 1) CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
- 2) The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
- 3) Risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.

MAINTENANCE

- 1) Prior to cleaning the product, make sure it has been disconnected from the power supply.
- 2) Use a dry or slightly moistened cloth for cleaning.
- 3) Never use any chemicals or abrasive materials for cleaning.

INSTALLATION STEPS

- 1) Fix the mounting clips to the ceiling with screws. Please refer to Table 1 for the distance “L” between two mounting clips.
- 2) Mount the fixture to the ceiling.
- 3) Open the diffuser and unfix the LED array, connect the input and ground wires of the driver box to the main power outlet.
- 4) Reattach the LED array and close the diffuser.

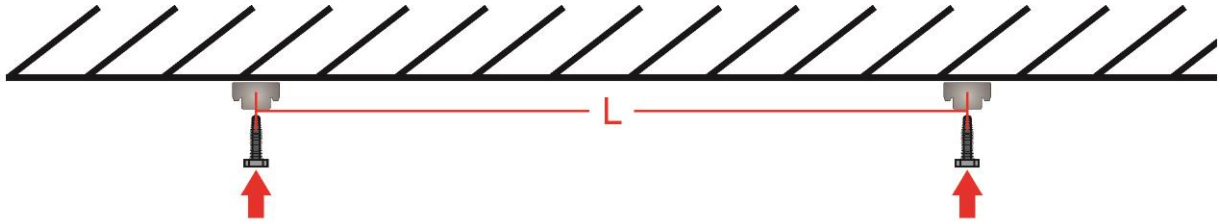


Table 1

Model	1.2 m (4 ft)	1.5 m (5 ft)
Distance (L)	919 mm (3.02 ft)	964 mm (3.16 ft)

